

## Dual M.2 PCIe SSD Carrier XMC Module


### Key Features

XM 620/x01 is an XMC adapter designed to carry up to two M.2 PCIe® SSD storage devices. It is suitable for use on a host board with an XMC site.

- Designed to carry up to two M.2 PCIe SSD devices
- Supplied with retention brackets
- Suitable for use on a board with an XMC expansion slot
- Air-cooled and conduction-cooled versions available
- Extended operating temperature versions available



Build Option: 2 x M.2 Devices Fitted

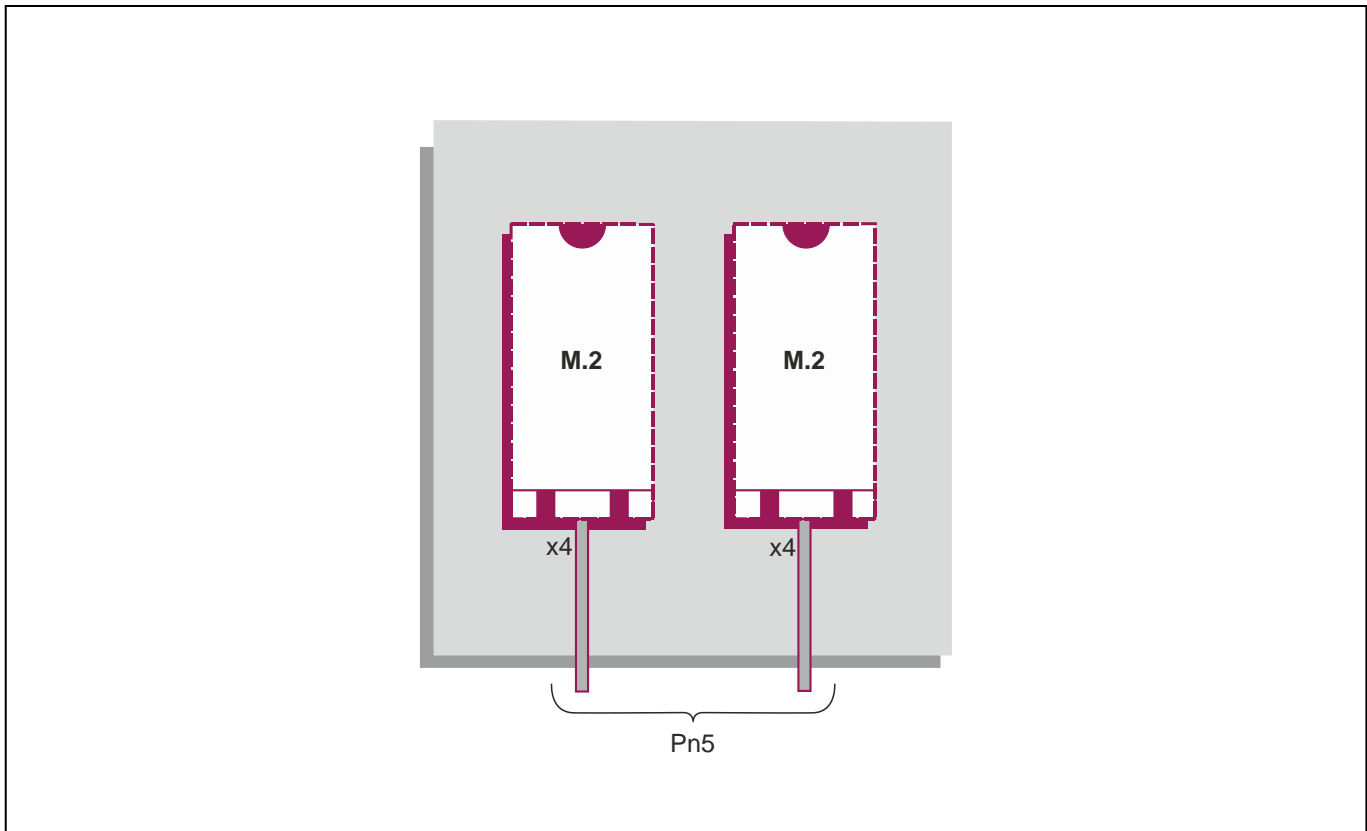

## Dual M.2 PCIe SSD Carrier XMC Module

- XMC module designed to carry up to two M.2 PCIe® SSD devices supporting:
  - x4 PCI Express® (PCIe®) interface (M-key)
  - NVMe Express® (NVMe™) logical device interface
  - RAID modes 0, 1, 5 and 10 when used with a software RAID driver
- factory build site options:
  - without M.2 devices
  - 1 x M.2 device fitted
  - 2 x M.2 devices fitted
- XMC Pn5 connector (build option), select:
  - VITA 42 XMC (color black)
  - VITA 61 XMC 2.0 (color white)
- hot-swap is not supported
- front panel LED activity indicator

## XMC Interface

- x4 PCIe interface for each M.2 site:
  - supports Gen 1, Gen 2 and Gen 3
- XMC connector type (build option) determines the maximum PCIe operational speed:
  - up to Gen 2, VITA 42 connector
  - up to Gen 3, VITA 61 connector
- complies to PCI Express Protocol Specification 3.0

## Software

- the host board's BIOS and the target operating system must include PCIe NVMe drive support

## Electrical Specification

- VPWR current without M.2 devices, select from either:
  - +5V @ 0.5A max.
  - +12V @ 0.2A max.
- +5V +5%/-5%, +12V +5%/-5%
- -12V not utilized

## N, E, K: Environmental Specification

- Type 2242, 2260 and 2280 devices
- operating temperatures:
  - 0°C to +55°C (N-Series)
  - -25°C to +70°C (E-Series)
  - -40°C to +85°C (K-Series)
- non-operating temperature: -40°C to +85°C
- 5% to 95% Relative Humidity, non condensing:
  - K-Series includes humidity sealant

## RC: Environmental Specification

- Type 2242 and 2260 devices
- conduction-cooled operating temperature (RC-Series):
  - VITA 47 Class CC4, -40°C to +85°C
  - conduction-cooled
- non-operating temperature:
  - VITA 47 Class C4, -55°C to +105°C
- operating altitude:
  - -1,000 to 50,000 feet (-305 to 15,240 meters)
- 5% to 95% Relative Humidity, non-condensing:
  - includes conformal coating

## Mechanical Specification

- single size CMC (Common Mezzanine Card) 74mm x 149mm:
  - conforming to ANSI/VITA 42.0-2008
- 10mm height stack module