

mb-microtec


self activated illumination




- Instantly combat ready (no on/off switching required)
- → Fast and accurate targeting under all light and weather conditions
- Always perfect contrast, even under rapidly changing light conditions
- → No brightness adjustment required
- → Completely maintenance free
- → No external energy source (battery) required

- → Ultra compact design
- → Reliable under extreme conditions
- Completely waterproof
- Allows shooting while exposing only minimal silhouette
- Minimal costs
- → 10 years' warranty on the light sources
- → Product available in red or green fibre

... ask your local gun dealer or visit www.mbmicrotec.com

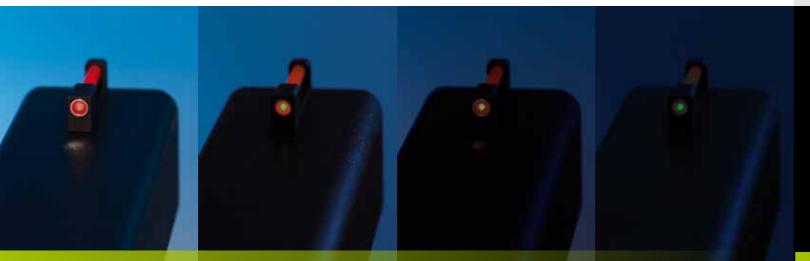

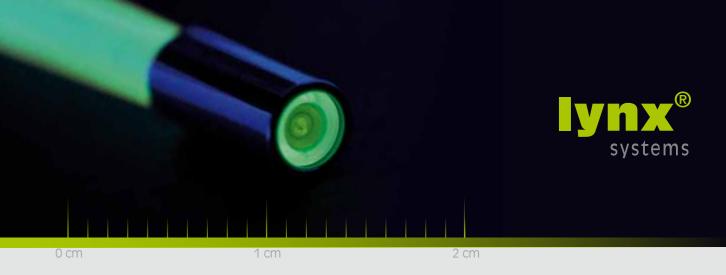

TACTICAL LYNX DATA SHEET

tactical lynx	total weight max. working temp.	0.16 g +90°C
Protective sleeve:	outer dia. Ø	3.2 +0/-0.1 mm
	length	7.3 +0.2/-0 mm
	material	aluminium
	window material	sapphire
Optical fibre:	outer dia. Ø	2.5 mm
	length	20.5 mm
	colour	red
	material	acrylic PMMA/PA
	hardness	ASTMD-785 M89
trigalight®	outer dia. Ø	1.5 mm
	length	6.0 mm
	colour	green
	activity	0.98 GBq
	isotope	T-2
	material	borosilicate glass
	brightness	350 μL
Tests:	lynx® light inserts have been tested to withstand ANSI N43.4-2005	
	Code T4GC test conditions.	

