

U.S.A.**U.S.A. & GLOBAL HEADQUARTERS**

23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)
Fax 310.326.3311

DEERFIELD**PELI HARDIGG CASES
USA HEADQUARTERS**

147 North Main Street
South Deerfield, MA 01373
Tel (800) 542-7344
Fax (413) 665-8330
www.peli.com

EUROPE**FOR INFORMATION ON PELI LIGHTS,
PELI CASES AND PELI STORM CASES
IN EUROPE:****EUROPE, MIDDLE EAST & AFRICA HQ**

PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 • Barcelona, Spain
Tel +34 934 674 999
Fax +34 934 877 393
www.peli.com

FRANCE

PELI PRODUCTS FRANCE S.A.S.
487 rue Léopold Le Hon
01000 • Bourg en Bresse, France
Tel +33 4 74 22 80 40
Fax +33 4 74 22 09 34
www.peli.com

GERMANY

PELI PRODUCTS GERMANY GmbH
Graf-Adolf-Platz 15
40213 • Düsseldorf, Germany
Tel +49 (0) 211 882 42 401
Fax +49 (0) 211 882 42 200
www.peli.com

**ADVANCED AREA LIGHTING
GROUP**

PELI AALG LTD.
4 Chater Court
Halifax Drive • Market Deeping
Peterborough PE6 8AH, United Kingdom
Tel +44 (0) 1778 349000
Fax +44 (0) 1778 349004
aalg.peli.com

UAE

PELICAN PRODUCTS
MIDDLE EAST
JAFZA 13 office 032, P.O.Box 261008
Jebel Ali - Dubai - United Arab Emirates
Tel +971 (0)4 8876550
Fax +971 (0)4 8876549

* We also have offices in Canada, Japan,
China, Australia, South Korea and India.

**FOR INFORMATION ON PELI HARDIGG
CASES IN EUROPE:****PELI-HARDIGG UK CASE CENTER**

Unit 4, Brookfield Industrial Estate
Leacon Road
Ashford Kent TN23 4TU
Tel +44 (0) 1233 895895

**PELI-HARDIGG FRANCE
CASE CENTER**

20/22 Rue des Petits Hôtels
75010 Paris, France
Tel +33 (0)1 44 83 95 63

LIGHTS CATALOGUE

REMOTE AREA LIGHTS ■ TACTICAL / DUTY LIGHTS ■ SAFETY APPROVED LIGHTS ■ LED LIGHTS ■ DIVE LIGHTS



©2013 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., a U.S. corporation, its subsidiaries and/or affiliates.
EU CODE: 0030-000-501E JAN. 13

Cordura® is a registered trademark of INVISTA
Lexan® is a registered trademark of SABIC

**DISTRIBUTED BY:**

MARKETS SERVED:

FIRE MILITARY INDUSTRIAL LAW ENFORCEMENT OUTDOOR DIVE



Lighting tools – they’re a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you’re in a situation that requires a lighting tool, you want to make sure you have the right one. Peli understands the critical importance of this tool. We provide a wide range of Advanced Lighting Systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Peli relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 lights standards (performance symbols and standards that effectively communicate a lighting tool’s features and benefits) and continue to increase the number of industry leading safety approvals for specific models.

Our new Lighting catalogue features multiple technology advances. These include LED performance upgrades, new switch features,

upgraded safety approvals and enhanced packaging. You’ll see that the contents within dovetail our commitment to environmentally friendly practices. Many of our lights use LED’s and provide several benefits that help us protect our planet. LED’s are longer lasting, promote extended battery life and are much brighter than incandescent bulbs.

From basic models to the high-performance 9410 LED Lantern (our brightest handheld torch to date) and the 9470 Remote Area Lighting System (which delivers 12,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Peli’s industry-leading guarantee of excellence.

So look through our new catalogue and discover the ideal lighting tools for your specific needs.

CONTENTS

1	Message from the President and CEO	
3-4	Performance Standards and Ratings	
5-6	Safety	
7-10	Remote Area Lighting Systems	
11-12	Personal Lights	
13-14	Medium Duty Lights	
15-16	Tactical/Duty Lights	
17-18	Tactical/Duty LED Lights	
19-20	LED Lights	
21-22	Head Lights	
23-27	Zone 0 & 1 Lights	
28	Heavy Duty Lights	
29-30	Dive Lights	
31-32	Light Mounting Systems and Holsters	
33-34	Helmet Light Holders	
35-39	Light Specification Charts	
40	Private Label Program/Cases and Specialty Products	
41	Global Locations	
42	Product Guarantee and Warranty	

Peli ProGear™ range - High performance products built for consumers

PERFORMANCE STANDARDS AND RATINGS

ANSI STANDARDS (American National Standards Institute)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs.

As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits.

GLOSSARY OF TERMS

CANDELA – A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

LUX – The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN – A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

INTEGRATING SPHERE –

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (Ingress Protection) – Ingress Protection (IP) ratings specify the environmental protection the enclosure

provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) where the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids.

RECHARGEABLE – Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



20 M

60 M

100 M

120 M



These standards are accredited by ANSI, which is a private non-profit organisation that oversees the development of voluntary consensus standards for products, services, processes, systems, and personnel in the United States.

The organisation also coordinates U.S. standards with international standards so American products can be used globally. Resulting ANSI/NEMA FL 1 Standards include the six criteria described below:




LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.




BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



WATER PROOF/ SUBMERSIBLE

Water Proof – IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardised conditions of pressure and time.

Submersible – IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

SAFETY



IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exacting requirements of ATEX directive 94/9/EC, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

Need more information about ATEX? Please visit www.peli.com

CE Ex II 1 G EX IA IIC T4/T6 *



* ATEX code corresponding to the 1930Z0 torch

COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATION

HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS 1	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	<ul style="list-style-type: none"> - Oil Refinery - - Paint Warehouse - - Offshore Oil Rig - - Spray Booth - 	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑ ↓ LEAST
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS 2	Combustible Dusts (Metals [Div.1 only], Coal, Grain)	<ul style="list-style-type: none"> - Coal Mine - - Grain Silo - - Munitions Factory - - Hay Storage Facility - 	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS 3	Ignitable Fibers & Flyings (Machined Magnesium)	<ul style="list-style-type: none"> - Paper Mill - - Woodworking Facility - - Textile Mill - - Cotton Gin - 	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	
			Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
				Category 3 / Zone 2 (Hazard Not Likely)	


* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS

Division 1: Where volatile substances can exist all of the time or some of the time under normal operating conditions.	Division 2: Where volatile substances are not likely to exist under normal operating conditions.	Category 1 / Zone 0: Flammable material present for long periods (more than 1.000 hours a year).	Category 3 / Zone 2: Flammable material present for short periods (less than 10 hours a year).
		Category 2 / Zone 1: Flammable material present in normal operation (10- 1.000 hours a year).	

EUROPEAN CLASSIFICATIONS

DIAGRAM OF CLASS / DIVISIONS / ZONES

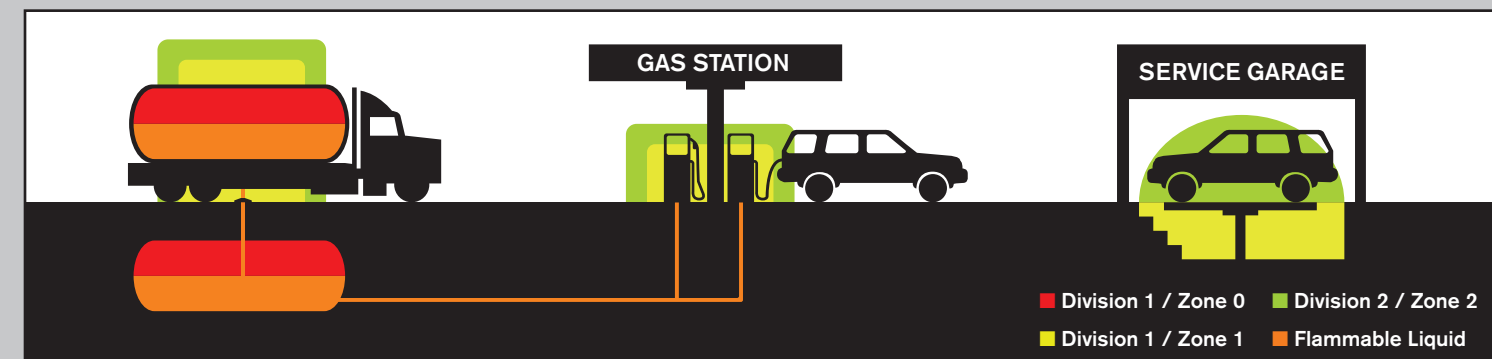


REMOTE AREA LIGHTING SYSTEMS

THE MOST INNOVATIVE RECHARGEABLE LIGHTING SYSTEM ON THE MARKET

Rechargeable Battery Powered Lighting for the most demanding tasks

- Redefines the Portable Lighting category
- 9 Models and growing
- Best in Class performance and durability
- Designed for Heavy Duty Jobs
- Safe, Noise Free, Fume Free,
- Spot Lighting, Flood Lighting, NVG Lighting
- New Intelligent Control Switch Technology optimises power output vs burntime
- New Safety approved 9435 for hazardous locations

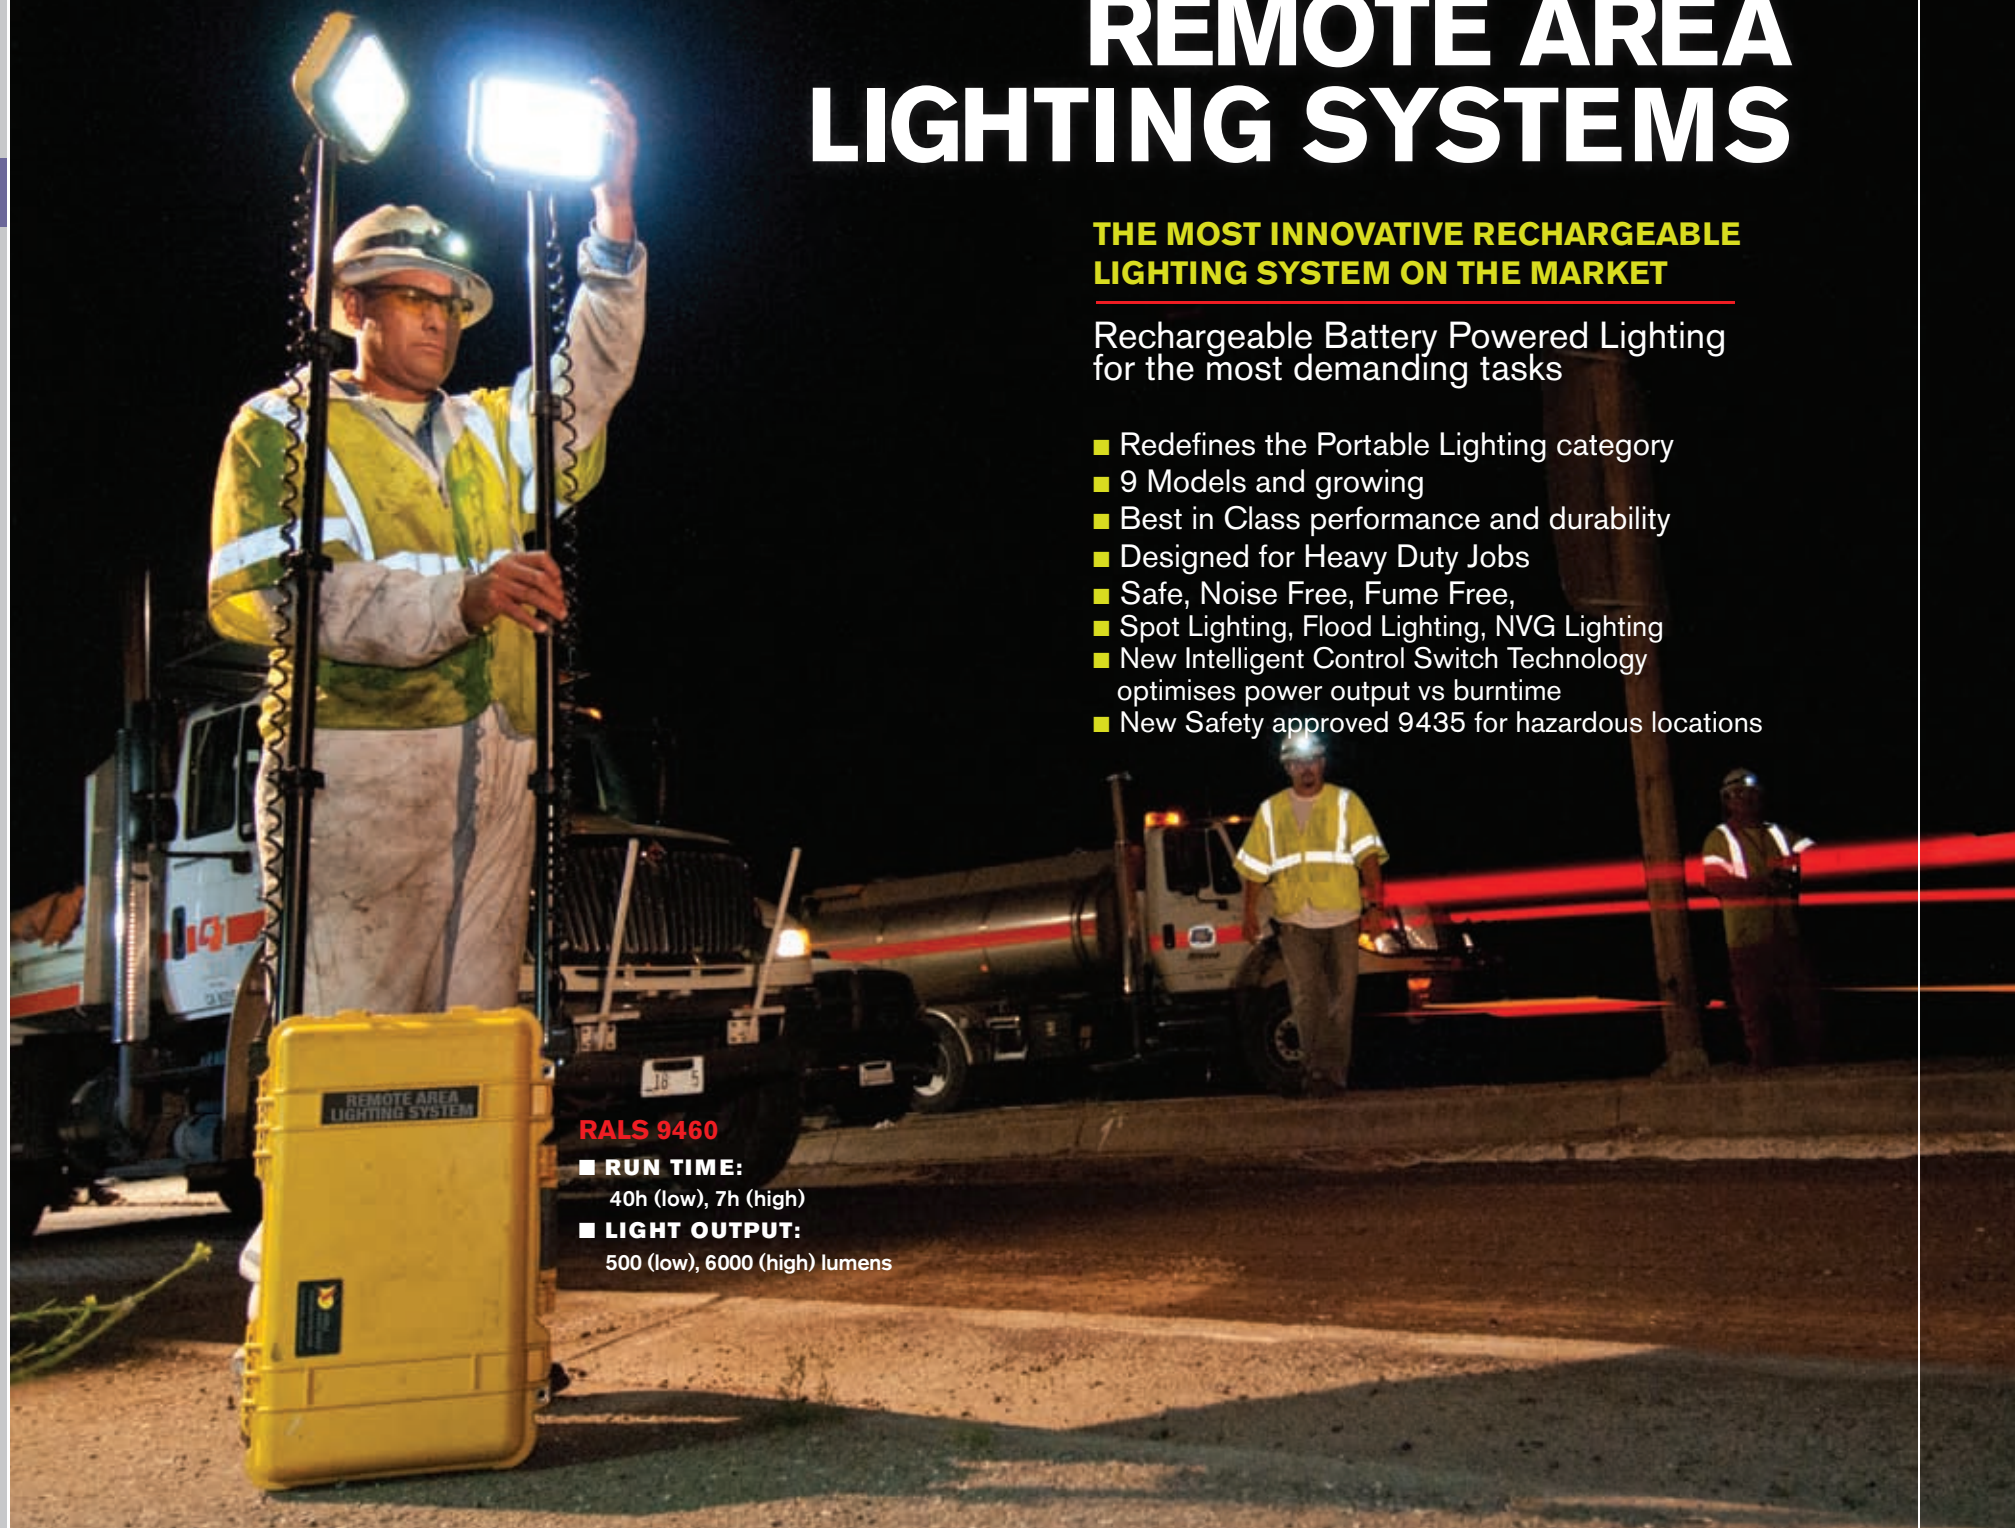


RALS 9460

- **RUN TIME:**
40h (low), 7h (high)
- **LIGHT OUTPUT:**
500 (low), 6000 (high) lumens

9430 REMOTE AREA LIGHTING SYSTEM UPGRADED MODEL




High Flux LED
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended

CE, RoHS
1500 (Low), 3000 (High)
15 hrs. (Low), 8 hrs. (High)
125°
6 per head
1

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
LIGHT OUTPUT
RUN TIME
BEAM SPREAD
NUMBER OF LEDs
LAMP HEADS


9430IR INFRARED REMOTE AREA LIGHTING SYSTEM



Infrared 940nm
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended

CE, RoHS
N/A
15 hrs. (Low), 8 hrs. (High)
N/A
24 per head
1


9430SL SPOT LIGHT REMOTE AREA LIGHTING SYSTEM



High Flux LED
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended

CE, RoHS
1000 (Low), 2000 (High)
15 hrs. (Low), 8 hrs. (High)
10°
24 per head
1

9435 REMOTE AREA LIGHTING SYSTEM NEW



High Flux LED
NIMH
15.75" (40 cm) Closed 32.28" (82 cm) Extended

II 3 G Ex ic IIC T4 Gc, CE, ETL, IECEx, RoHS
750 (Low), 1500 (High)
10 hrs. (Low), 5 hrs. (High)
90°
18 per head
1



RALS 9435
PELI'S FIRST SAFETY APPROVED
REMOTE AREA LIGHTING SYSTEM
Class I Division 2 groups ABCD T4

9440 REMOTE AREA LIGHTING SYSTEM



LIGHT SOURCE	LED
BATTERIES	NiMH
LENGTH	37.4" (95 cm) Closed 86.25" (219 cm) Deployed
COLOUR	■ ■
APPROVALS	CE, RoHS
LIGHT OUTPUT	1200 (Low), 2400 (High)
RUN TIME	6 hrs. (Low), 3 hrs. (High)
BEAM SPREAD	120°
NUMBER OF LEDs	10 per head
LAMP HEADS	1

LIGHT SOURCE	LED
BATTERIES	NiMH
LENGTH	37.4" (95 cm) Closed 86.25" (219 cm) Deployed
COLOUR	■ ■
APPROVALS	CE, RoHS
LIGHT OUTPUT	1200 (Low), 2400 (High)
RUN TIME	6 hrs. (Low), 3 hrs. (High)
BEAM SPREAD	120°
NUMBER OF LEDs	10 per head
LAMP HEADS	1



9420 LED WORK LIGHT PELI PROGEAR™ **NEW**



LIGHT SOURCE	Cree
BATTERIES	Rech. Lithium ion
LENGTH	29" (73.6 cm) Closed 62" (157.4 cm) Extended
COLOUR	■
APPROVALS	CE, RoHS
LIGHT OUTPUT	500 (Low), 1000 (High)
RUN TIME	4 hrs. (Low), 2hrs. (High)
BEAM SPREAD	58°
NUMBER OF LEDs	2 per head
LAMP HEADS	1

- 9420XL LED Work Light Kit includes:**
- Blow-moulded Case
 - 2 - Cat #9421 Lithium-ion Batteries
 - Cat #9422 DC Vehicle Charger
 - Cat #9423 AC Main Charger with Transformer
 - Cat #9424 Charging Station
 - Cat #9427 Easy Carry Shoulder Strap

9460 REMOTE AREA LIGHTING SYSTEM **UPGRADED MODEL**



LIGHT SOURCE	High Flux LED
BATTERIES	12v Rechargeable, Sealed
LENGTH	22.0" (55.9 cm) Closed 70.87" (179.9 cm) Extended
COLOUR	■ ■
APPROVALS	CE, RoHS
LIGHT OUTPUT	500 (Low), 6000 (High)
RUN TIME	40 hrs. (Low), 7 hrs. (High)
BEAM SPREAD	90°
NUMBER OF LEDs	6 per head
LAMP HEADS	2

- 9460RS model includes:**
- Remote Activation Control
 - 4x4 Mobility Kit

Tailor Burn Time Intelligent Control

9470 REMOTE AREA LIGHTING SYSTEM **UPGRADED MODEL**



LIGHT SOURCE	High Flux LED
BATTERIES	12v Rechargeable, Sealed
LENGTH	24.83" (63 cm) Closed 72.85" (185 cm) Extended
COLOUR	■ ■
APPROVALS	CE, RoHS
LIGHT OUTPUT	1000 (Low), 12000 (High)
RUN TIME	40 hrs. (Low), 7 hrs. (High)
BEAM SPREAD	90°
NUMBER OF LEDs	6 per head
LAMP HEADS	4

- 9470RS model includes:**
- Remote Activation Control
 - 4x4 Mobility Kit

Tailor Burn Time Intelligent Control


9500 SHELTER LIGHTING SYSTEM



LIGHT SOURCE	High Flux LED
BATTERIES	N/A
LENGTH	20.62" (52.4 cm)
COLOUR	■
APPROVALS	CE, RoHS
LIGHT OUTPUT	1200 (Red LED), 6000 (White LED)
RUN TIME	N/A
BEAM SPREAD	210° Diffused
NUMBER OF LEDs	36 per head - 24 white/12 red
LAMP HEADS	3

LIGHT SOURCE	High Flux LED
BATTERIES	12v Rechargeable, Sealed
LENGTH	24.83" (63 cm) Closed 72.85" (185 cm) Extended
COLOUR	■ ■
APPROVALS	CE, RoHS
LIGHT OUTPUT	1000 (Low), 12000 (High)
RUN TIME	40 hrs. (Low), 7 hrs. (High)
BEAM SPREAD	90°
NUMBER OF LEDs	6 per head
LAMP HEADS	4



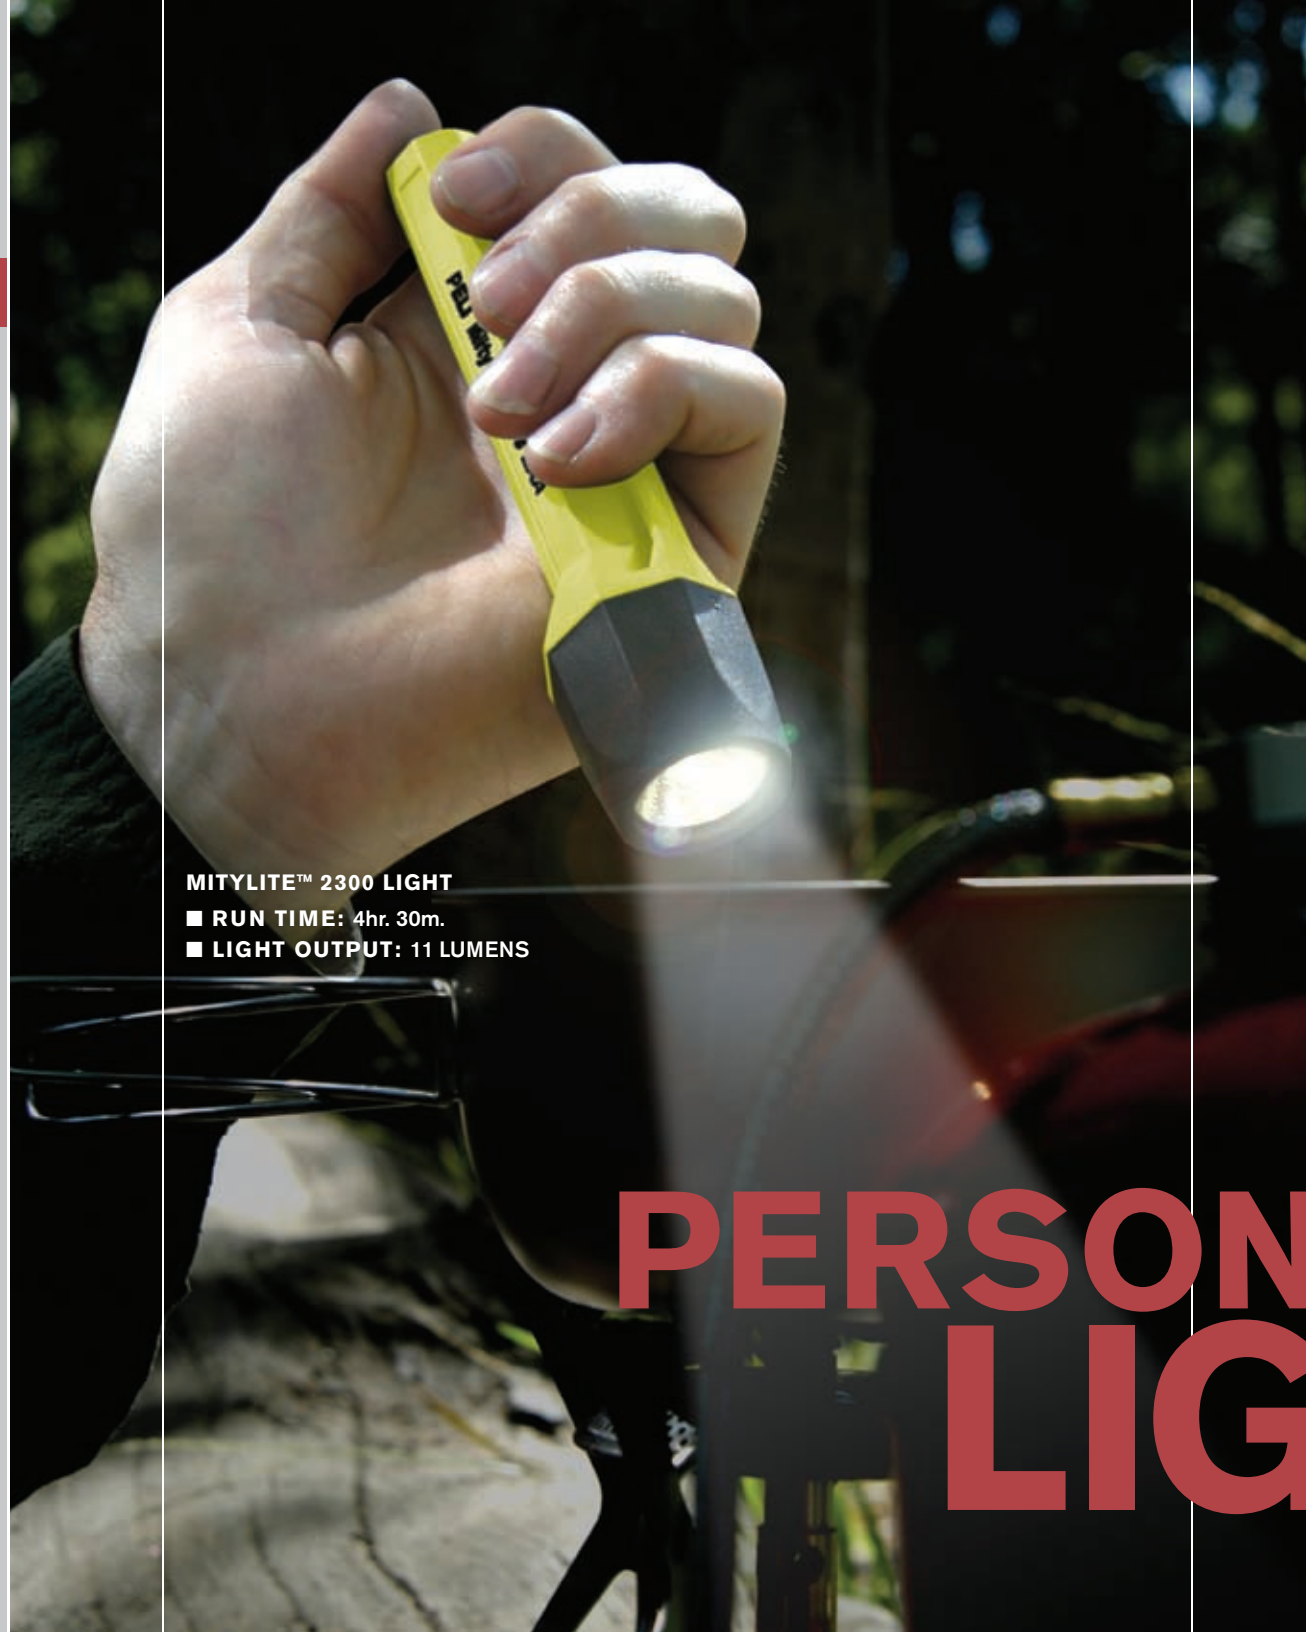

MITYLITE™ 2300 LIGHT
 ■ RUN TIME: 4hr. 30m.
 ■ LIGHT OUTPUT: 11 LUMENS

PERSONAL LIGHTS

CLOSE AND PERSONAL LIGHTING

Comfortable in your back pocket but confident in tough situations where safety is paramount. These are your handy go-to lights built tough with brightness that penetrates thick smoke and fog.

MITYLITE™ 1900



XENON
 2 AAA Alkaline (Included)
 4.09" (10.4cm)
 C1 D1
 Ex ib e IIC T4 IP67 IEC Ex TSA 06.0021X

FL1 STANDARD 11 LUMENS	FL1 STANDARD 1h 30min	FL1 STANDARD 45m	FL1 STANDARD 571cd	FL1 STANDARD 1m
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE
 BATTERIES
 LENGTH
 COLOUR
 APPROVALS
 ANSI STANDARDS

1910 LED

PELI PROGEAR™ NEW



LED
 1 AAA Alkaline (Included)
 3.6" (9.1 cm)
 N/A

FL1 STANDARD 39 LUMENS	FL1 STANDARD 1h	FL1 STANDARD 62m	FL1 STANDARD 967cd	FL1 STANDARD WATER RESISTANT
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
 BATTERIES
 LENGTH
 COLOUR
 APPROVALS
 ANSI STANDARDS

1920 LED

PELI PROGEAR™ NEW



LED
 2 AAA Alkaline (Included)
 5.3" (13.5 cm)
 N/A

FL1 STANDARD 67 LUMENS	FL1 STANDARD 2h 45min	FL1 STANDARD 81m	FL1 STANDARD 1648cd	FL1 STANDARD WATER RESISTANT
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
 BATTERIES
 LENGTH
 COLOUR
 APPROVALS
 ANSI STANDARDS

VERSABRITE™ 2250 DELUXE LIGHT



XENON
 2 AA Alkaline (Included)
 3.87" (9.8cm)
 CI II D2

FL1 STANDARD 7 LUMENS	FL1 STANDARD 5h 30min	FL1 STANDARD 54m	FL1 STANDARD 726cd	FL1 STANDARD WATER RESISTANT
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

MITYLITE™ 2300



XENON
 2 AA Alkaline (Included)
 5.62" (14.3cm)
 CI D1

FL1 STANDARD 11 LUMENS	FL1 STANDARD 4h 30min	FL1 STANDARD 43m	FL1 STANDARD 478cd	FL1 STANDARD WATER RESISTANT
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

MITYLITE™ 2340



XENON
 2 AA Alkaline (Included in select packaging)
 6.25" (15.9cm)
 CI D1
 Ex ib e IIC T4 IP67 IEC Ex TSA 06.0021X

FL1 STANDARD 10 LUMENS	FL1 STANDARD 4h 30min	FL1 STANDARD 43m	FL1 STANDARD 461cd	FL1 STANDARD WATER RESISTANT
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT



SABRELITE™ 2000
 ■ RUN TIME: 5h
 ■ LIGHT OUTPUT: 53 LUMENS

MEDIUM DUTY LIGHTS

MEDIUM SIZE, LARGE PERFORMANCE

The most handy lighting tools for the hard working professional and extreme outdoor enthusiasts. Features include chemical-resistant bodies and hi-power Xenon lamp modules.

PELLILITE™ 1800



XENON
 2 C Alkaline (Not included)
 6" (15.2cm)
 ■ ■
 C1 II D2

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

STEALTHLITE™ RECHARGEABLE 2450



XENON
 4 AA NiMH (Included)
 6.5" (16.5cm)
 ■ ■
 C1 II D2

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

SABRELITE™ 2000



Photoluminescent 2003PL Shroud

XENON
 3 C Alkaline (Not included)
 7.79" (19.8cm)
 ■ ■
 C1 D2
 IEC Ex TSA 06.0021X Ex ib e IIC T4 IP67

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

STEALTHLITE™ 2400




XENON
 4 AA Alkaline (Included)
 6.49" (16.5cm)
 ■ ■
 C1 D1

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

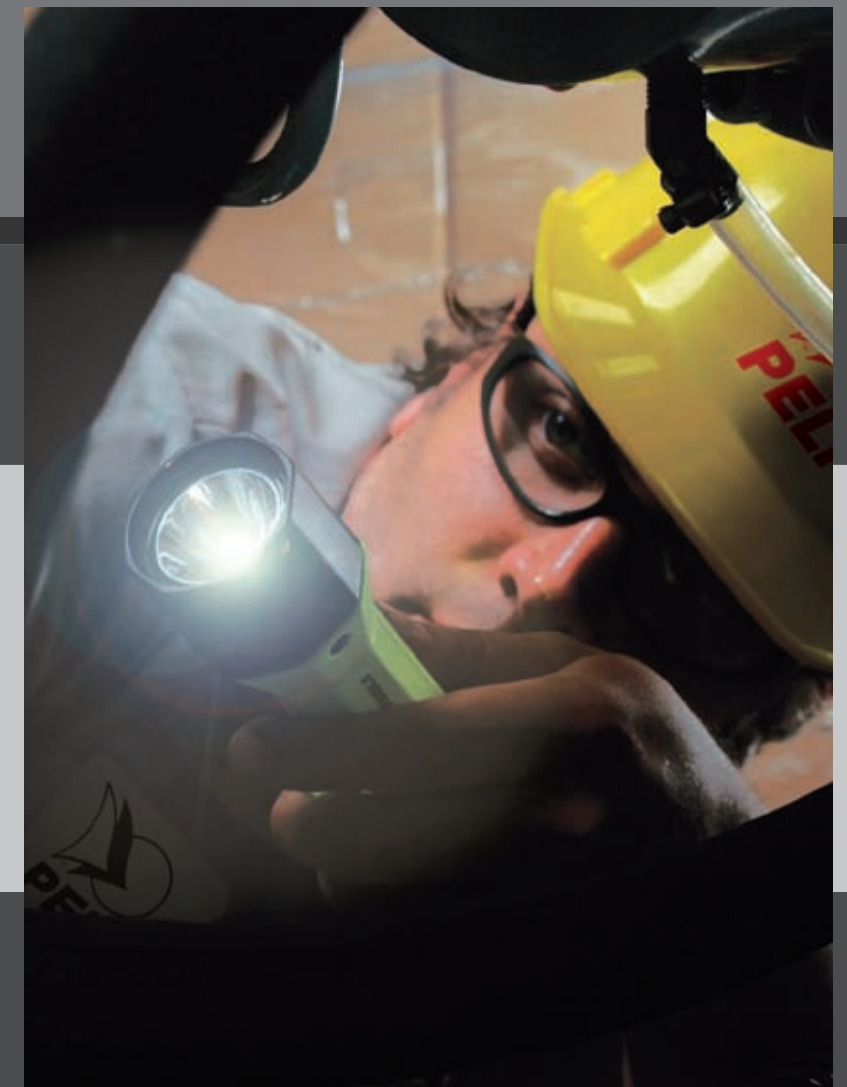



M6 2320
 ■ RUN TIME: 1h 15m
 ■ LIGHT OUTPUT: 82 LUMENS

TACTICAL/DUTY LIGHTS

TACTICAL OR PATROL, PELI HAS YOU COVERED

These handheld and firearm-mountable lights will leave subjects frozen in their tracks. They are lightweight with no-slip bodies for a sure grip. Push button switch is easy to operate, even when wearing thick gloves. Safety features include a polarity guard tray that makes operating the torch impossible if cells are inverted and prevents dangerous outgassing. Smaller models make the ideal backup to the larger, primary patrol lights.

M11 RECHARGEABLE 8050



LIGHT SOURCE	XENON
BATTERIES	4C Ni-MH (Included)
LENGTH	11.25" (28.6cm)
COLOUR	■
APPROVALS	N/A

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

M6 2320



LIGHT SOURCE	XENON
BATTERIES	2 CR123 Lithium (Included)
LENGTH	5.51" (14cm)
COLOUR	■
APPROVALS	N/A

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS


PM6 3320



LIGHT SOURCE	XENON
BATTERIES	2 CR123 Lithium (Included)
LENGTH	5.27" (13.4cm)
COLOUR	■
APPROVALS	N/A

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

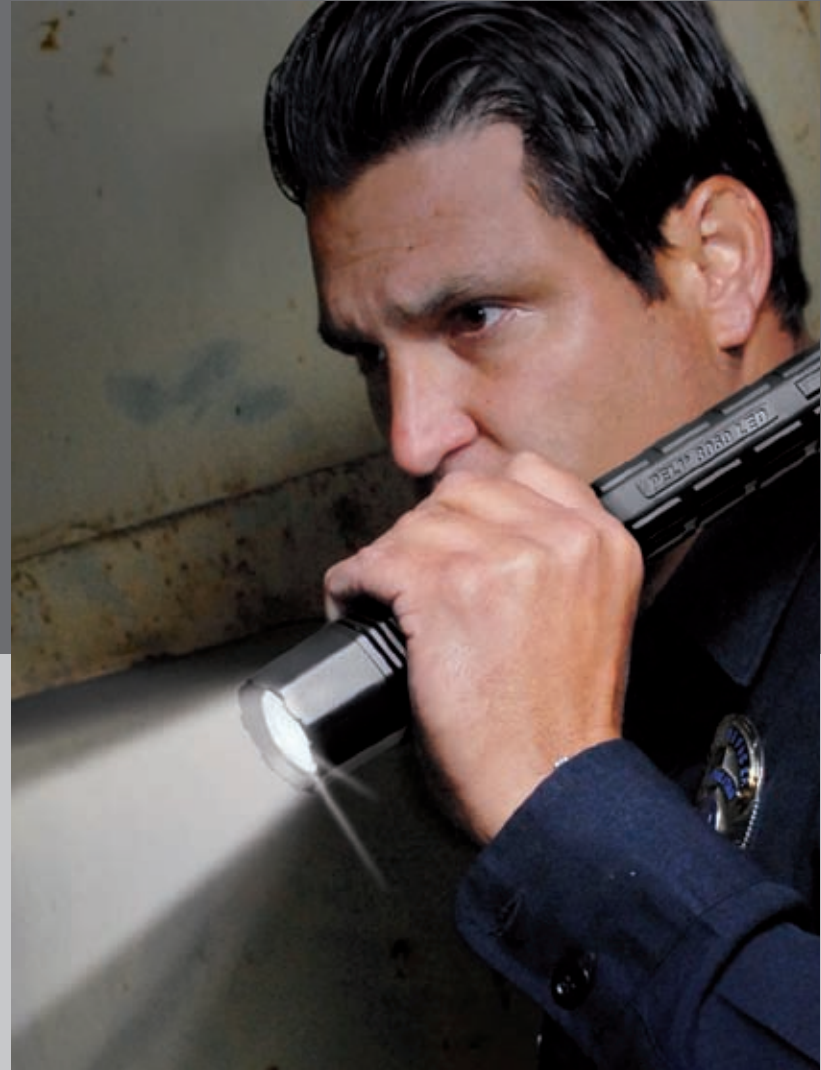



M6 2330 LED
 ■ RUN TIME: 6 hrs.
 ■ LIGHT OUTPUT: 100 LUMENS

TACTICAL/DUTY LED LIGHTS

ADVANCED LED TECHNOLOGY

Packed with advanced LEDs that are powerful yet highly efficient foreextended run times. Built tough to withstand the hard knocks that come with the job. Select models have a unique no-slip grenade grip body. Includes the 7060 LED, featuring patented dual switch technology. It was designed from a collaboration between Peli and the City of Los Angeles Police Department (LAPD™) and is standard issue for numerous police departments.

M6 2330 LED					
LIGHT SOURCE	LED				
BATTERIES	2 CR123 Lithium (Included)				
LENGTH	5.51" (14cm)				
COLOUR	■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	

2360 LED PELI PROGEAR™					
LIGHT SOURCE	LED				
BATTERIES	2 AA Alkaline (Included)				
LENGTH	6.1" (15.5cm)				
COLOUR	■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	

2370 LED PELI PROGEAR™ NEW					
LIGHT SOURCE	LED				
BATTERIES	2 AA Alkaline (Included)				
LENGTH	6.43" (16.3 cm)				
COLOUR	■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	

M6 3W 2390 LED					
LIGHT SOURCE	LED				
BATTERIES	2 CR123 Lithium (Included)				
LENGTH	5.31" (13.5cm)				
COLOUR	■ ■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	

PM6 3330 LED					
LIGHT SOURCE	LED				
BATTERIES	2 CR123 Lithium (Included)				
LENGTH	5.27" (13.4cm)				
COLOUR	■ ■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	

7060 LED UPGRADED MODEL					
LIGHT SOURCE	LED				
BATTERIES	1 3.7 V, 2200 mAh Lithium-Ion (Included)				
LENGTH	8.65" (22cm)				
COLOUR	■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	

8060 LED UPGRADED MODEL					
LIGHT SOURCE	LED				
BATTERIES	4 C SIZE Ni-MH (Included)				
LENGTH	12.67" (32.2cm)				
COLOUR	■				
APPROVALS	N/A				
ANSI STANDARDS					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT	



2365 LED FLEX NECK
 ■ RUN TIME: 7 hrs.
 ■ LIGHT OUTPUT: 49 LUMENS

LED LIGHTS

LED PRESCRIPTION FOR THE NEAR OR FAR SIGHTED

From the garage to the refinery, you'll find your bright, efficient, and durable LED lighting tool here. All are engineered with leading-edge technology and a strong build quality.

L1™ 1930 LED


		LED		
4 LR 44 Alkaline (Included)		2.64" (6.7cm)		
		C1 D1 Ex ia IIC T4 IP65 IEC Ex TSA 06.0021X		
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

SABRELITE™ 2010 LED

		LED		
3 C Alkaline (Not included)		8.11" (20.6cm)		
		C1 II III D1		
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE



Photoluminescent 2013PL Shroud

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

VB3™ 2220 LED

PELI PROGEAR™

		LED		
2 CR2032 Lithium (Included)		3.5" (8.9cm)		
		C1 D1 Ex ib IIC T6 Gb IECEx ITS 10.0021		
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

STEALTHLITE™ 2410 LED

		LED		
4 AA Alkaline (Included)		7" (17.8cm)		
		C1 II III D1		
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLOUR
- APPROVALS

ANSI STANDARDS

2365 LED FLEX NECK

		LED		
2 AA Alkaline (Not Included)		21.92" (55.7cm)		
		N/A		
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

STEALTHLITE™ RECHARGEABLE 2460 LED

		LED		
4 AA NiMH (Included)		7" (17.8cm)		
		C1 II D2		
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

HEADSUP LITE™ 2690 LED
 ■ RUN TIME: 10 hrs. 30 mins.
 ■ LIGHT OUTPUT: 60 LUMENS
 (see page 26)



HEAD LIGHTS

FREE YOUR HANDS

For two-handed tasks on the factory floor or at base camp, Peli™ head lights lead the way. Super bright Incandescent and LED models include a rubber strap for helmet/hard hat use as well as an adjustable cloth strap.

HEADSUP LITE™ 2620

	Xenon (high) LED (low)			
	3 AAA Alkaline (Included)			
	2.16" (5.5cm)			
	C1 D1 II 3 G EEx nL IIC T3X			
				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

HEADSUP LITE™ 2640

	Halogen (high) LED (low)			
	4 AA Alkaline (Included)			
	2.63" (6.7cm)			
	C1 D2 II 3 G EEx nL IIC T3X			
				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT







HEADSUP LITE™ 2680 RECOIL™ LED

	Recoil™ LED			
	4 AA Alkaline (Included)			
	4.64" (11.8cm)			
	CI II III D2			
				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

HEADSUP LITE™ 2710 PELI PROGEAR™ NEW

	LED			
	2 AAA Alkaline (Included)			
	2.58" (6,6cm)			
	N/A			
				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

HEADSUP LITE™ 2720 PELI PROGEAR™ NEW

	LED			
	3 AAA Alkaline (Included)			
	2.48" (6.3cm)			
	N/A			
				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT




ATEX CERTIFIED

Peli's range of 15 models of Zone 0 and Zone 1 lights complies with the standards of the ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for the large variety of hazardous environments.

ZONE 0 & 1

(ATEX Cat. 1 and 2)

MITYLITE™ 1900Z1



Xenon
2 Alkaline (Included)
4.09" (10.4 cm)
[Yellow] [White]
II 2G Ex e ib IIB T4, II 2D Ex ibD 21
IP67 T100°C

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE

BATTERIES

LENGTH

COLOUR

APPROVALS

ANSI STANDARDS

SABRELITE™ 2000Z1



Xenon
3 C Alkaline (Not included)
7.79" (19.8 cm)
[Yellow] [White]
II 2 G Ex e ib IIC T4

Photoluminescent 2003PL Shroud

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE

BATTERIES

LENGTH

COLOUR

APPROVALS

ANSI STANDARDS

L1 1930Z0



LED
4 LR 44 Alkaline (Included)
2.64" (6.7 cm)
[White]
II 1 G Ex ia IIC T4/T6

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE

BATTERIES

LENGTH

COLOUR

APPROVALS

ANSI STANDARDS

SABRELITE™ 2010Z0



LED
3 C Alkaline (Not included)
8.11" (20.6 cm)
[Yellow] [White]
II 1 G Ex ia IIC T4 Ga

Photoluminescent 2013PL Shroud

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE

BATTERIES

LENGTH

COLOUR

APPROVALS

ANSI STANDARDS

MITYLITE™ 1965Z0



LED
2 Alkaline AAA (Included)
5.48" (13.9 cm)
[Yellow] [White]
II 1 GD Ex ia IIC T4 Ga Ex iaD 20
IP65 T90°C Da

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE

BATTERIES

LENGTH

COLOUR

APPROVALS

ANSI STANDARDS

VB3 2220Z1



LED
2 CR2032 Lithium (Included)
3.5" (8.9 cm)
[Black] [Yellow]
II 2 G Ex ib IIC T6

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE

BATTERIES

LENGTH

COLOUR

APPROVALS

ANSI STANDARDS

MITYLITE™ 2340Z1



Xenon	
2 AA Alkaline (Not included)	
6.25" (15.9 cm)	
	
II 2 G Ex e ib IIC T4	

 6 LUMENS	 6h 45min	 34m	 285cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

STEALTHLITE™ 2400Z1



Xenon	
4 AA Alkaline (Not included)	
6.49" (16.5 cm)	
	
II 2 G Ex e ib IIC T4	

 38 LUMENS	 4h 30min	 156m	 6194cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

STEALTHLITE™ 2410Z0



LED	
4 AA Alkaline (Not included)	
7" (17.8 cm)	
	
ITS.0 9 .0 0 17X Ex ia IIC T4 G a, Ex ia IIIC T135C Da IP6 6	

 126 LUMENS	 7h 30min	 161m	 6500cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS



STEALTHLITE™ RECHARGEABLE 2460Z1



LED	
4 AA NiMH (Included)	
7" (17.8 cm)	
	
II 2 G Ex ib IIC T4 G b	

 112 LUMENS	 4h 30min	 153m	 5828cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

HEADSUP LITE™ 2610Z0



LED	
3 AAA Alkaline (Included)	
1.49" (3.8 cm)	
	
II 1 G Ex ia IIC T4 Ga	

 30 LUMENS	 19h	 28m	 194cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

HEADSUP LITE™ 2690Z0



LED	
3 AAA Alkaline (Included)	
2.81" (7.1 cm)	
	
CE Ex Approval I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, Ex ia IIIC T65°C Da IP65	

 60 LUMENS	 10h 30min	 81m	 1664cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

LITTLE ED™ 3610Z0



LED	
4 AA Alkaline (Not included)	
7.51" (19.1 cm)	
	
II 1 G Ex ia IIC T4 G a, II 1 D Ex ia IIIC T135°C Da IP6 6	

 126 LUMENS	 7h 30min	 161m	 6500cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS



LITTLE ED™ RECHARGEABLE 3660Z1

	LED			
4 AA NiMH (Included)				
7.51" (19.1 cm)				
II 2 G Ex ib IIC T4 Gb				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

3715Z0

NEW


	LED							
4 AA Alkaline (Not included)								
5.36" (13.6 cm)								
II 1G Ex ia IIC T4 Ga								
LIGHT OUTPUT		RUNTIME		BEAM DISTANCE		PEAK BEAM INTENSITY		WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS



HEAVY DUTY LIGHTS

PACK THE POWER, NOT THE KILOS
 Our heavy duty lights are big on performance, yet light in weight. The rechargeable 9410 LED Lantern uses four LEDs (for high, low, and flashing mode) powered by the latest generation NiMH batteries with charge status indicator.

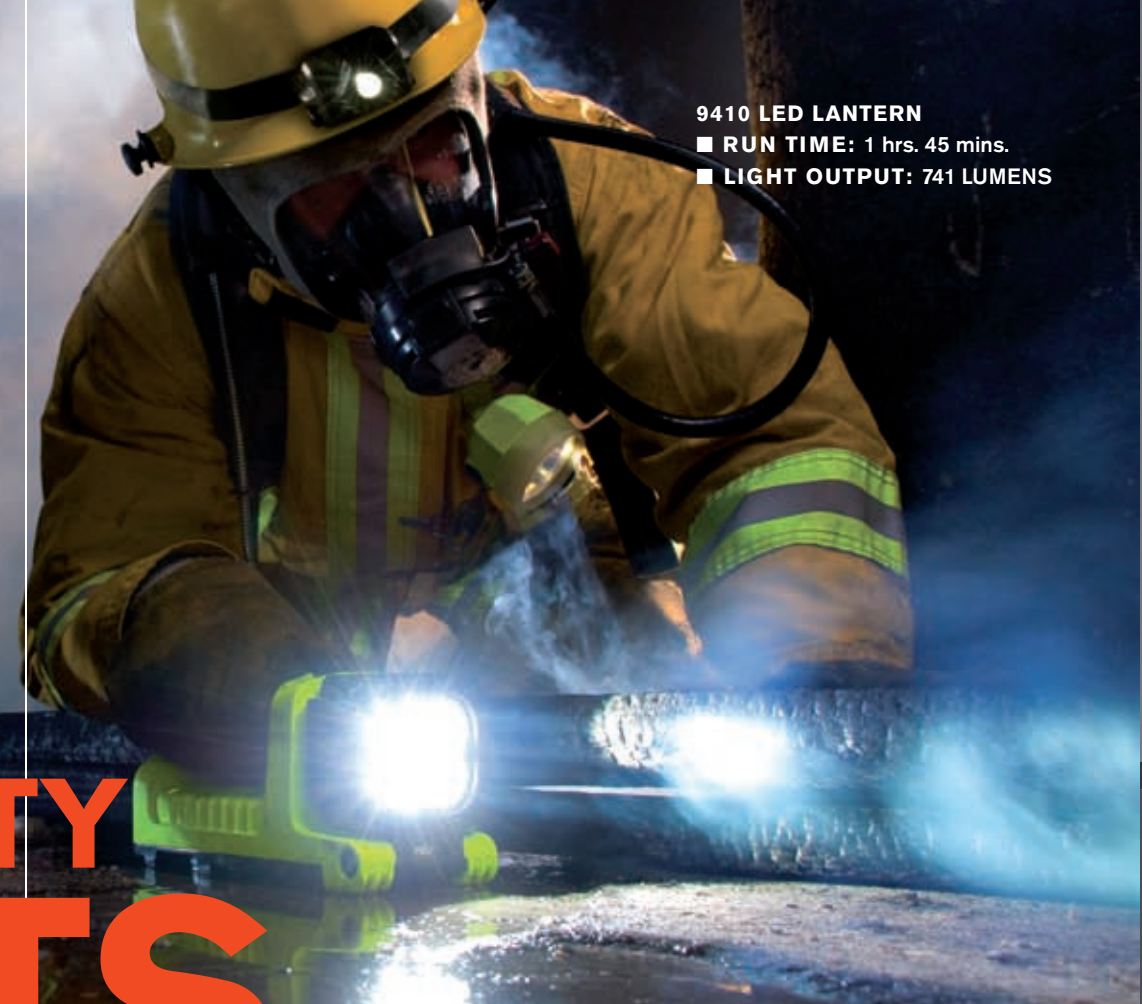

9410 LED LANTERN
 ■ RUN TIME: 1 hrs. 45 mins.
 ■ LIGHT OUTPUT: 741 LUMENS

9410 LED LANTERN		NEW						
	LED							
4 D Ni-MH (Included)								
8.75" (22.2cm)								
N/A								
LIGHT OUTPUT		RUNTIME		BEAM DISTANCE		PEAK BEAM INTENSITY		WATER RESISTANT

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS









NEMO™ 4300
 ■ RUN TIME: 6 hrs.
 ■ LIGHT OUTPUT: 175 LUMENS
 ■ SUBMERSIBLE: 100m

NEMO SERIES

DIVE

SCUBA

Discover new underwater worlds with the help of our extensive selection of dive lights. Whether in search of a pocket model, such as the lightweight 1960N that fits in your BC pocket, or a primary light with long burn time such as the Nemo™ 4300, there is a member of the Peli™ Nemo™ family to suit your diving needs.

NEMO™ 1960					
LIGHT SOURCE	LED				
BATTERIES	2 AAA Alkaline (Included)				
LENGTH	5.48" (13.9 cm)				
COLOUR					
APPROVALS	N/A				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

NEMO™ 2010					
		LED			
3 C Alkaline (Not included)					
8.11" (20.6 cm)					
					
N/A					
					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE	

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

NEMO™ 2410					
		LED			
4 AA Alkaline (Included)					
7" (17.8 cm)					
					
N/A					
					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE	

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS

NEMO™ 4300					
		Xenon			
8 C Alkaline (Not included)					
7.5" (19cm)					
					
N/A					
					
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE	

LIGHT SOURCE
BATTERIES
LENGTH
COLOUR
APPROVALS
ANSI STANDARDS





LIGHT MOUNTING SYSTEMS AND HOLSTERS

Check availability, minimum quantities and lead time



Our tactical pressure switch replaces the standard tailcap on the torch. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip.



610 FRONT SIGHT MOUNT
Fits Peli Lights - 2320, 2330, 2390
Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



630 FOREGRIP MOUNT
Fits Peli Lights - 2320, 2330, 2390
Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5



620 SIDE SLING MOUNT
Fits Peli Lights - 2320, 2330, 2390
Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



2326 REMOTE PRESSURE SWITCH
Fits Peli Lights -2320, 2330, 2390
COLOUR: Black • WT.: 2.0 oz.

HOLSTER STYLE

	2327 Cordura® Holster	2357 Cordura® Holster	2407 Cordura® Holster	7076 Plain Holster	7078 Cordura® Holster	7079 Basketweave Holster	8057 Cordura® Holster
PELI™ TORCH							
2300	•						
2320	•						
2330	•						
2390	•						
2340/NVG		•					
2400/NVG			•				
2400PL			•				
2450			•				
2410			•				
2410PL			•				
2460			•				
7060				•	•	•	
8040							•
8050							•



HELMET LIGHT HOLDERS



770 UNIVERSAL HELMET LIGHT HOLDER
 Fits most known helmet designs and functions with 16 different Peli torches. Tough polymer construction with brass inserts and stainless steel hardware.

Fits the Following Peli Lights:

- MityLite™ 2300
- M6 2320
- M6 2330 LED
- MityLite™ 2340 & 2340NVG
- M6 3W 2390 LED
- StealthLite™ 2400, 2400NVG
- StealthLite™ 2410 Recoil™ LED
- MityLite™ 2430
- StealthLite™ Rechargeable 2450
- StealthLite™ Rechargeable 2460 Recoil™ LED
- PM6 3320
- PM6 3330 LED
- Other Helmet Light Holders available (see chart on next page)

LIGHT HOLDER STYLE

	CAT. #700	CAT. #710	CAT. #711	CAT. #750	CAT. #760	CAT. #770
PELI™ TORCH						
1900/NVG						
1960						
2140				•	•	
2250	•			•	•	
2300				•	•	•
2320						•
2330						•
2340/NVG		•	•	•	•	•
2390						•
2400/NVG/PL	•	•	•	•	•	•
2410/PL	•	•	•	•	•	•
2430	•	•	•	•	•	•
2450	•	•	•	•	•	•
2460	•	•	•	•	•	•
3320						•
3330						•

REMOTE AREA LIGHTING SYSTEMS

Cat No.	Model Name	Light Source	Batteries	Lumens	Runtime	Beam Spread	Number of LEDs	Lamp Heads	Approvals	Length	Weight	Colours
9420	9420 LED Work Light	Cree	Rech. Lithium ion	500 (Low), 1000 (High)	4 hrs. (Low), 2hrs. (High)	58°	2 per head	1	CE, RoHS	29" (73.6 cm) Closed 62" (157.4 cm) Extended	8.4 lbs. (3.81 kg)	■
9430	9430 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	1500 (Low) 3000 (High)	15h (Low) 8h (High)	125°	6 LEDs per head	1	CE, RoHS	15.75" (40 cm) closed 32.28" (82 cm) extended	22.65 lbs. (10.27 kg)	■ ■
9430IR	9430IR Infrared Remote Area Lighting System	Infrared 940nm	12v Rechargeable, Sealed	N/A	15h (Low) 8h(High)	N/A	24 LEDs per head	1	CE, RoHS	15.75" (40 cm) closed 32.28" (82 cm) extended	22.05 lbs. (10 kg)	■
9430SL	9430SL Spot Light Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	1000 (Low) 2000 (High)	15h (Low) 8h (High)	10°	24 LEDs per head	1	CE, RoHS	15.75" (40 cm) closed 32.28" (82 cm) extended	22.05 lbs. (10 kg)	■
9435	9435 Remote Area Lighting System	High Flux LED	NiMH	750 (Low) 1500 (High)	10h (Low) 5h (High)	90°	18 LEDs per head	1	II 3 G Ex ic IIC T4 Gc, CE, ETL, IECEx, RoHS	15.75" (40 cm) closed 32.28" (82 cm) extended	17.6 lbs. (7.98 kg)	■
9440	9440 Remote Area Lighting System	LED	NiMH	1200 (Low) 2400 (High)	6h (Low) 3h (High)	120°	10 LEDs per head	1	CE, RoHS	37.4" (95 cm) closed 86.25" (219 cm) extended	16.09 lbs. (7.3 kg)	■ ■
9460	9460 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	500 (Low) 6000 (High)	40h (Low) 7h (High)	90°	6 LEDs per head	2	CE, RoHS	22" (55.9 cm) closed 70.87" (179.9 cm) extended	50.71 lbs. (23 kg)	■ ■
9470	9470 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	1000 (Low) 12000 (High)	40h (Low) 7h (High)	90°	6 LEDs per head	4	CE, RoHS	24.83" (63 cm) closed 72.85" (185 cm) extended	88.18 lbs. (40 kg)	■ ■
9500	9500 Shelter Lighting System	High Flux LED	N/A	1200 (Red) 6000 (White)	Constant 120V	210° Diffused	36 LEDs per head 24 White/ 12 Red	3	CE, RoHS	20.62" (52.4 cm)	29.8 lbs. (13.52 kg)	■
Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/ Submersible/ Water Resistant	Approvals	Length	Weight with Batteries	Colours
1900	MityLite™ 1900	Xenon	2 AAA Alkaline (Included)	11 LUMENS	1h 30m	45m	571cd	IPX7	C1 D1 Ex ib e IIC T4 IP67 IEC Ex TSA 06.0021X	4.09" (10.4 cm)	1.6 oz. (0.05 kg)	■ ■ ■ ■ ■
1910	1910 LED	LED	1 AAA Alkaline (Included)	39 LUMENS	1h	62m	967cd	IPX4	N/A	3.6" (9.1 cm)	1.4 oz. (0.04 kg)	■
1920	1920 LED	LED	2 AAA Alkaline (Included)	67 LUMENS	2h 45m	81m	1648cd	IPX4	N/A	5.3" (13.5 cm)	2.2 oz. (0.06 kg)	■
2250	VersaBrite™ 2250 Deluxe Light Kit	Xenon	2 AA Alkaline (Included)	7 LUMENS	5h 30m	54m	726cd	IPX4	CI II D2	3.87" (9.8 cm)	3 oz. (0.09 kg)	■
2300	MityLite™ 2300	Xenon	2 AA Alkaline (Included)	11 LUMENS	4h 30m	43m	478cd	IPX4	CI D1	5.62" (14.3 cm)	3.4 oz. (0.1 kg)	■ ■
2340	MityLite™ 2340	Xenon	2 AA Alkaline (Included in select packaging)	10 LUMENS	4h 30m	43m	461cd	IPX4	CI D1 Ex ib e IIC T4 IP67 IEC Ex TSA 06.0021X	6.25" (15.9 cm)	3.5 oz. (0.1 kg)	■ ■

PERSONAL LIGHTS

MEDIUM DUTY LIGHTS

TACTICAL / DUTY LIGHTS

TACTICAL/DUTY LED LIGHTS

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/ Submersible/ Water Resistant	Approvals	Length	Weight with Batteries	Colours
1800	PeliLite™ 1800	Xenon	2 C Alkaline (Not included)	21 LUMENS	7h	131m	4370cd	IPX7	CI II D2	6" (15.2 cm)	7.8 oz. (0.22 kg)	■ ■
2000	SabreLite™ 2000	Xenon	3 C Alkaline (Not included)	53 LUMENS	5h	158m	6234cd	IPX7	C1 D2 IEC Ex TSA 06.0021X Ex ib e IIC T4 IP67	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	■ ■
2400	StealthLite™ 2400	Xenon	4 AA Alkaline (Included)	45 LUMENS	3h 45m	125m	3934cd	IPX7	CI D1	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	■ ■
2450	StealthLite™ Rechargeable 2450	Xenon	4 AA NiMH (Included)	35 LUMENS	3h 30m	122m	3735cd	IPX7	CI II D2	6.5" (16.5 cm)	7.8 oz. (0.22 kg)	■ ■
2320	M6 2320	Xenon	2 CR123 Lithium (Included)	82 LUMENS	1h 15m	145m	5260cd	IPX4	N/A	5.51" (14 cm)	5.6 oz. (0.16 kg)	■
3320	PM6 3320	Xenon	2 CR123 Lithium (Included)	81 LUMENS	1h 30m	131m	4330cd	IPX4	N/A	5.27" (13.4 cm)	3.45 oz. (0.1 kg)	■
8050	M11 Rechargeable 8050	Xenon	4C Ni-MH (Included)	154 LUMENS	2h 15m	257m	16,535cd	IPX4	N/A	11.25" (28.6 cm)	17.92 oz. (0.51 kg)	■
2330	M6 2330 LED	LED	2 CR123 Lithium (Included)	100 LUMENS	6h	93m	2184cd	IPX4	N/A	5.51" (14 cm)	5.5 oz. (0.16 kg)	■
2360	2360 LED	LED	2 AA Alkaline (Included)	110 (High) 10 (Low) LUMENS	2h (High) 40h (Low)	158m (High) 49m (Low)	6242cd (High) 615cd (Low)	IPX4	N/A	6.1" (15.7 cm)	5.4 oz. (0.15 kg)	■
2370	2370 LED	LED	2 AA Alkaline (Included)	106 (High) 13 (Low) LUMENS	3h 45m (High) 41h 15m (Low)	158m (High) 52m (Low)	6283cd (High) 684cd (Low)	IPX4	N/A	6.43" (16.3 cm)	6.5 oz. (0.18 kg)	■
2390	M6 3W 2390 LED	LED	2 CR123 Lithium (Included)	177 LUMENS	2h 30m	155m	6002cd	IPX4	N/A	5.31" (13.5 cm)	5.6 oz. (0.16 kg)	■ ■
3330	PM6 3330 LED	LED	2 CR123 Lithium (Included)	90 LUMENS	4h 45m	88m	1959cd	IPX4	N/A	5.27" (13.4 cm)	3.45 oz. (0.1 kg)	■ ■
7060	7060 LED	LED	1 3.7 V, 2200 mAh Lithium-Ion (Included)	164 (High) 36 (Low) LUMENS	2h 15m (High) 15h (Low)	243m (High) 113m (Low)	14,768cd (High) 3,217cd (Low)	IPX4	N/A	8.65" (22 cm)	10.4 oz. (0.29 kg)	■
8060	8060 LED	LED	4 C SIZE Ni-MH (Included)	180 (High) 19 (Low) LUMENS	7h (High) 48h 45m (Low)	277m (High) 87m (Low)	19,187 (High) 1,899 (Low)	IPX4	N/A	12.67" (32.2 cm)	23.2 oz. (0.66 kg)	■

LED LIGHTS

HEAD LIGHTS

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/ Submersible/ Water Resistant	Approvals	Length	Weight with Batteries	Colours
1930	L1™ 1930 LED	LED	4 LR 44 Alkaline (Included)	12 LUMENS	4h 15m	17m	70cd	IPX4	C1 D1 Ex ia IIC T4 IP65 IEC Ex TSA 06.0021X	2.64" (6.7 cm)	0.9 oz. (0.03 kg)	Black Yellow
2220	VB3™ 2220 LED	LED	2 CR2032 Lithium (Included)	9 LUMENS	34h	12m	38cd	IPX4	C1 D1 Ex ib IIC T6 Gb IECEx ITS 10.0021	3.5" (8.9 cm)	1 oz. (0.03 kg)	Black Yellow
2365	2365 LED Flex Neck	LED	2 AA Alkaline (Not Included)	49 LUMENS	7h	81m	1644cd	IPX4	N/A	21.92" (55.7 cm)	9.3 oz. (0.26 kg)	Black
2010	SabreLite™ 2010 LED	LED	3 C Alkaline (Not included)	106 LUMENS	32h	144m	5189cd	IPX7	CI II III D1	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	Black Yellow
2410	StealthLite™ 2410 LED	LED	4 AA Alkaline (Included)	126 LUMENS	7h 30m	161m	6500cd	IPX7	CI II III D1	7" (17.8 cm)	7.3 oz. (0.21 kg)	Black Yellow
2460	Stealthlite™ Rechargeable 2460 LED	LED	4 AA NiMH (Included)	112 LUMENS	4h 30m	153m	5828cd	IPX7	CI II D2	7" (17.8 cm)	7.8 oz. (0.22 kg)	Black Yellow
2620	HeadsUp Lite™ 2620	Xenon (High) LED Low	3 AAA Alkaline (Included)	26 (High) 14 (Low) LUMENS	2h 15m (High) 18h (Low)	44m (High) 29m (Low)	491cd (High) 216cd (Low)	IPX4	C1 D1 II 3 G EEx nL IIC T3X	2.16" (5.5 cm)	4.8 oz. (0.14 kg)	Black
2640	HeadsUp Lite™ 2640	Halogen (High) LED Low	4 AA Alkaline (Included)	29 (High) 16 (Low) LUMENS	2h 45m (High) 17h (Low)	46m (High) 20m (Low)	586cd (High) 103cd (Low)	IPX4	C1 D2 II 3 G EEx nL IIC T3X	2.63" (6.7 cm)	10.9 oz. (0.31 kg)	Black
2680	HeadsUp Lite™ 2680 Recoil™ LED	Recoil™ LED	4 AA Alkaline (Included)	79 LUMENS	10h	123m	3789cd	IPX7	CI II III D2	4.64" (11.8 cm)	9.7 oz. (0.27 kg)	Black
2710	HeadsUp Lite™ 2710	LED	2 AAA Alkaline (Included)	24 (High) 7 (Low) LUMENS	2h (High) 5h (Low)	34m (High) 14m (Low)	285cd (High) 50cd (Low)	IPX4	N/A	2.58" (6.6 cm)	2.9 oz. (0.08 kg)	Black
2720	HeadsUp Lite™ 2720	LED	3 AAA Alkaline (Included)	80 (High) 5 (Low) LUMENS	8h (High) 175h (Low)	56m (High) 15m (Low)	790cd (High) 60cd (Low)	IPX4	N/A	2.48" (6.3 cm)	3.8 oz. (0.11 kg)	Black

ZONE 0 & 1

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/ Submersible/ Water Resistant	Approvals	Length	Weight with Batteries	Colours
1900Z1	MityLite™ 1900 Zone 1	Xenon	2 AAA Alkaline (Included)	11 LUMENS	1h 30 m	45m	571cd	IPX7	II 2G Ex e ib IIB T4, II 2D Ex ibD 21 IP67 T100°C	4.09" (10,4 cm)	1,6 oz. (0,05 kg)	Yellow White
1930Z0	L1 1930 LED Zone 0	LED	4 LR 44 Alkaline (Included)	12 LUMENS	4h 15m	17m	70cd	IPX4	II 1 G Ex ia IIC T4/T6	2,64" (6,7 cm)	0,9 oz. (0,03 kg)	White
1965Z0	MityLite™ 1965 Zone 0	LED	2 AAA Alkaline (Included)	21 LUMENS	4h.	51m	756cd	IPX7	II 1 GD Ex ia IIC T4 Ga Ex iaD 20 IP65 T90°C Da	5.48" (13.9 cm)	1.9 oz. (0.05 kg)	Yellow White
2000Z1	SabreLite™ 2000 Zone 1	Xenon	3 C Alkaline (Not included)	39 LUMENS	6h	177m	7852cd	IPX7	II 2 G Ex e ib IIC T4	7,79" (19,8 cm)	12,8 oz. (0,36 kg)	Yellow White
2010Z0	SabreLite™ 2010 LED Zone 0	LED	3 C Alkaline (Not included)	109 LUMENS	32h	144m	5189cd	IPX7	II 1 G Ex ia IIC T4 Ga	8,11" (20,6 cm)	13,4 oz. (0,38 kg)	Yellow White
2220Z1	VB3™ 2220Z1 LED	LED	2 CR2032 Lithium (Included)	9 LUMENS	34h	12m	38cd	IPX4	II 2 G Ex ib IIC T6	3,5" (8,9 cm)	1 oz. (0,03 kg)	Black Yellow
2340Z1	MityLite™ 2340 Zone 1	Xenon	2 AA Alkaline (Not included)	6 LUMENS	6h 45m	34m	185cd	IPX4	II 2 G Ex e ib IIC T4	6,25" (15,9 cm)	3,5 oz. (0,1 kg)	Yellow White
2400Z1	StealthLite™ 2400 Zone 1	Xenon	4 AA Alkaline (Not included)	38 LUMENS	4h 30m	156m	6194cd	IPX7	II 2 G Ex e ib IIC T4	6,49" (16,5 cm)	7,1 oz. (0,2 kg)	Yellow White
2410Z0	StealthLite™ 2410 LED Zone 0	LED	4 AA Alkaline (Not included)	126 LUMENS	7h 30m	161m	6500cd	IPX7	ITS.0 9 .0 0 17X Ex ia IIC T4 G a, Ex ia IIC T135C Da IP6 6	7" (17,8 cm)	7,3 oz. (0,21 kg)	Yellow White
2460Z1	StealthLite™ Rechargeable 2460 LED Zone 1	LED	4 AA NiMH (Included)	112 LUMENS	4h 30m	153m	5828cd	IPX7	II 2 G Ex ib IIC T4 G b	7" (17,8 cm)	7,8 oz. (0,22 kg)	Yellow White
2610Z0	HeadsUp™ Lite 2610 LED Zone 0	LED	3 AAA Alkaline (Included)	30 (High) 14 (Low) LUMENS	19h (High) 47h (Low)	28 (High) 19 (Low)	194cd (High) 91cd (Low)	IPX4	II 1 G Ex ia IIC T4 Ga	1,49" (3,8 cm)	3,2 oz. (0,09 kg)	Black

ZONE 0 & 1

DIVE LIGHTS

HEAVY DUTY

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/ Submersible/ Water Resistant	Approvals	Length	Weight with Batteries	Colours
2690Z0	HeadsUp™ Lite 2690 Zone 0	LED	3 AAA Alkaline (Included)	60 LUMENS	10h 30m	81m	1664cd	IPX7	CE Ex Approval I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, Ex ia IIIC T65°C Da IP65	2,81" (7,1 cm)	4,1 oz. (0,12 kg)	■
3610Z0	Little Ed™ 3610 LED Zone 0	LED	4 AA Alkaline (Not included)	126 LUMENS	7h 30m	161m	6500cd	IPX7	II 1 G Ex ia IIC T4 G a, II 1 D Ex ia IIIC T135A°C Da IP6 6	7,51" (19,1 cm)	10,5 oz. (0,3 kg)	■ ■
3660Z1	Little Ed™ Rechargeable 3660 LED Zone 1	LED	4 AA NiMH (Included)	112 LUMENS	4h 30m	153m	5828cd	IPX7	II 2 G Ex ib IIC T4 Gb	7,51" (19,1 cm)	10,5 oz. (0,3 kg)	■ ■
3715Z0	3715Z0 LED	LED	4 AA Alkaline (Not included)	174 (High) 95 (Low) 32 (Downcast) 142 (Flashing) LUMENS	4h 45m (High) 8h 30m (Low) 31h (Downcast) 10h (Flashing)	278m (High) 175m (Low) 28m (Downcast) 278m (Flashing)	19389cd (High) 8051cd (Low) 197cd (Downcast) 19389cd (Flashing)	IPX4	II 1 G Ex ia IIC T4 Ga	5,36" (13,6 cm)	14,4 oz. (0,41 kg)	■
1960N	Nemo™ 1960	LED	2 AAA Alkaline (Included)	24 LUMENS	3h	51m	657cd	IPX8	N/A	5,48" (13,9 cm)	1,9 oz. (0,05 kg)	■ ■ ■
2010N	Nemo™ 2010	LED	3 C Alkaline (Not included)	109 LUMENS	32h	144m	5189cd	IPX8	N/A	8,11" (20,6 cm)	13,4 oz. (0,38 kg)	■ ■ ■
2410N	Nemo™ 2410	LED	4 AA Alkaline (Included)	126 LUMENS	7h 30m	161m	6500cd	IPX8	N/A	7" (17,8 cm)	7,3 oz. (0,21 kg)	■ ■ ■
4300N	Nemo™ 4300	Xenon	8 C Alkaline (Not included)	175 LUMENS	6h	143m	5222cd	IPX8	N/A	7,5" (19 cm)	36,64 oz. (1,04 kg)	■ ■ ■
9410	9410 LED Lantern	LED	4 D Ni-MH (Included)	741 (High) 300 (Low) LUMENS	1h 45m (High) 4h 45m (Low)	425m (High) 249m (Low)	45,260cd (High) 15,516cd (Low)	IPX4	N/A	8,75" (22,2 cm)	49,28 oz. (1,4 kg)	■ ■



PRIVATE LABEL

Peli Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Peli lights. Our in-house private label moulding and production department has complete short and long run capabilities for a variety of custom

applications and custom colours. We have the latest hot stamping equipment, utilizing the world's most durable epoxy inks and foils in our screening, hot tipping, embossing, and moulding programs.



GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the torch of your choice.



HOT STAMPING DEPARTMENT

Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply.



100% ACCURACY

Peli's strict QA inspection team will check for quality of print and 100% accuracy in colour and placement.



PELI AND PELI STORM CASES



MICRO CASES



SPECIALTY PRODUCTS



ROTO MOULDED PRODUCTS


CASES AND SPECIALTY PRODUCTS

The same durability and ingenuity built into every Peli light also sets our cases and specialty products apart. We are protecting equipment in the world's harshest environments.

- Watertight cases for wet conditions
- Long cases for military and law enforcement
- Specialised laptop and organisation solutions for off site jobs
- Micro Case protection for small electronics
- Specialty products for portable workspace and organisation solutions

SEE OUR COMPLETE LINE OF CASES AND SPECIALTY PRODUCTS AT

WWW.PELI.COM

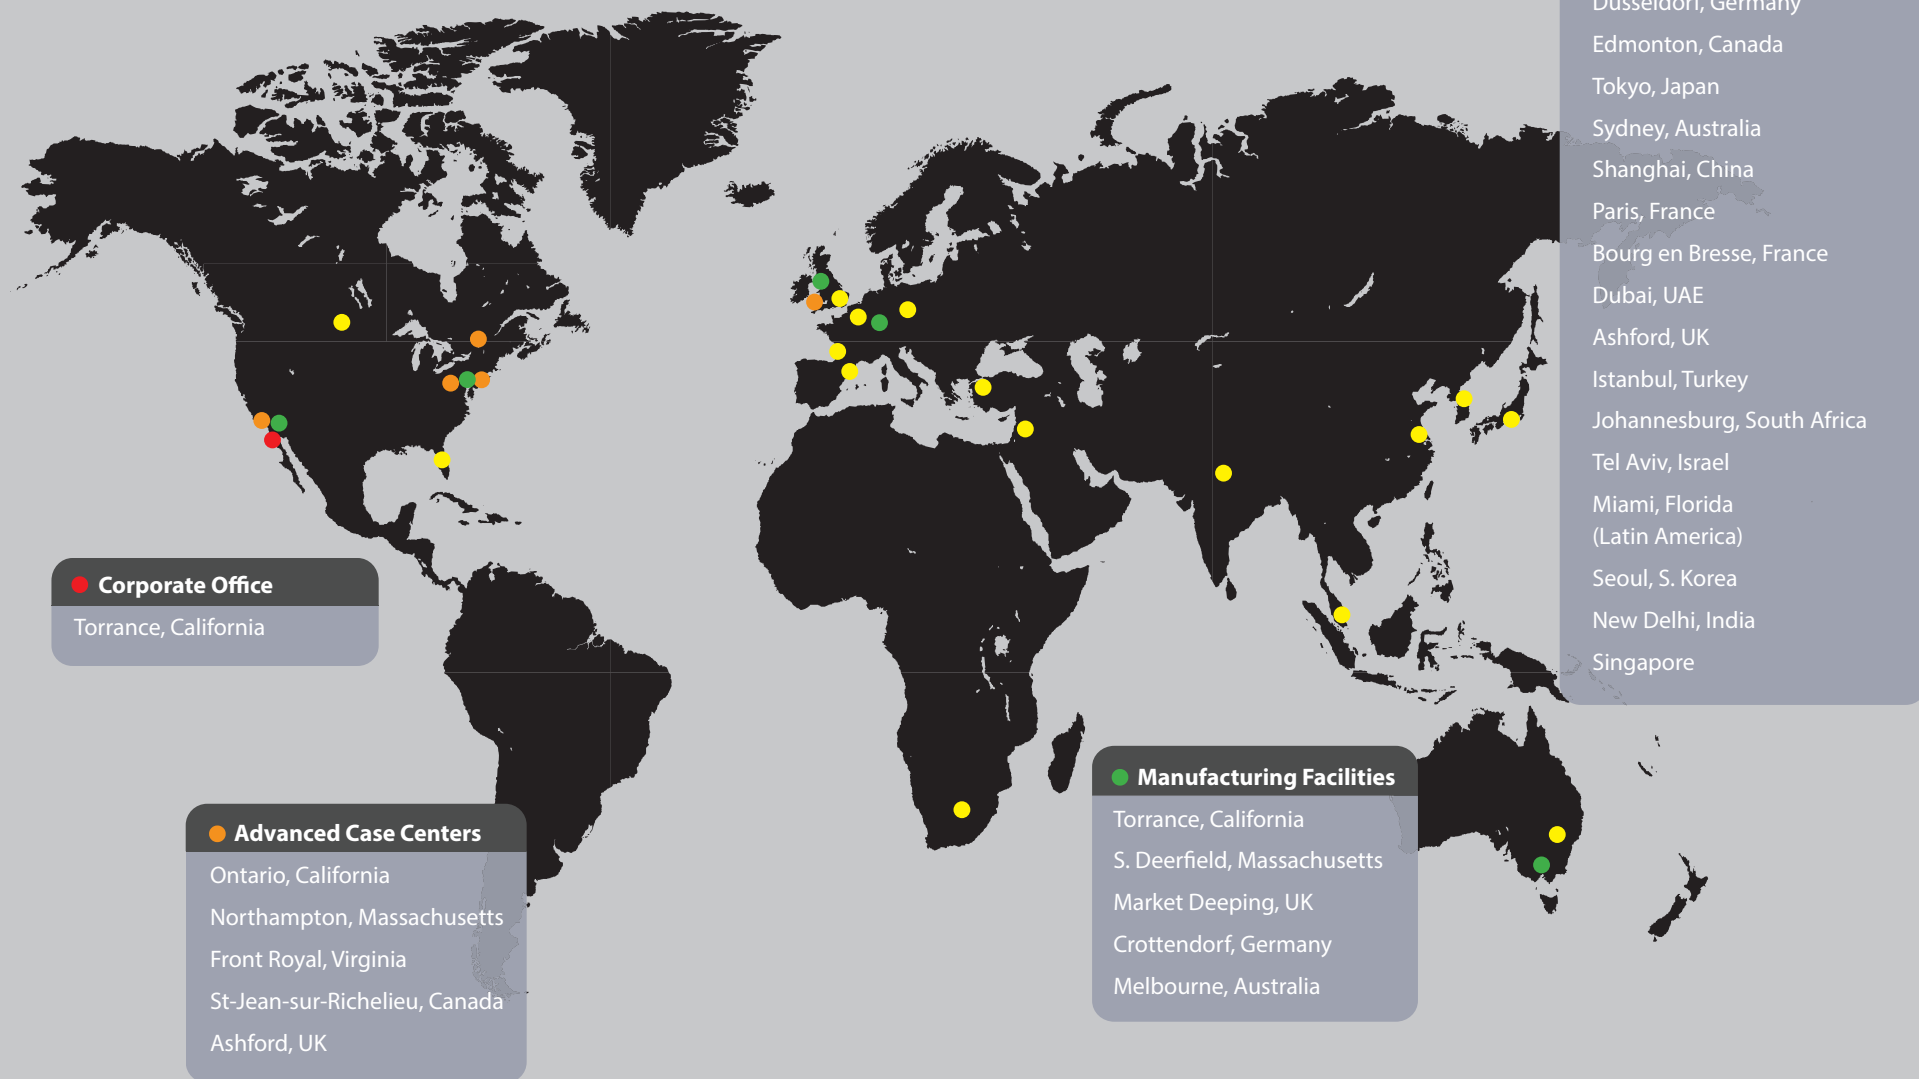**LIGHTS****PELI LEGENDARY GUARANTEE OF EXCELLENCE**

Peli Products, S.L.U. guarantees its lights for a lifetime* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries.

Peli will either repair or replace any defective product, at our sole option. TO THE EXTENT PERMITTED BY LAW, THE REMEDIES HEREBY PROVIDED SHALL BE THE EXCLUSIVE AND SOLE REMEDY OF THE PURCHASER.

TO THE EXTENT PERMITTED BY LAW: (A) THIS WARRANTY IS IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE; AND (B) ALL OTHER IMPLIED WARRANTIES AND ANY LIABILITY NOT BASED UPON CONTRACT ARE HERBY DISCLAIMED AND EXCLUDED.

TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL PELI BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE.

To the extent permitted by law, in no event shall Peli's liability to the purchaser for damages hereunder exceed the purchase price of the product in respect of which damages are claimed. To make a warranty claim in Europe, Africa and/or the Middle East, the purchaser must contact a Peli Authorized Distributor. Any warranty claims shall be made by the purchaser as soon as practicable. In the event that it is determined the product is defective within the terms of this warranty, the Authorized Dealer will inform the customer whether the product will be repaired or replaced, at its sole option.

All warranty claims of any nature are barred if the light has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Some countries do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from

country to country. Consumers have legal rights under applicable national legislation governing the sale of consumer goods. This guarantee does not affect those rights.

*Lifetime guarantee not applicable where prohibited by law.

Lifetime Guarantee does not cover

Roto Moulded cases, AALG products or fabric portion of backpacks.

REMOTE AREA LIGHTING SYSTEMS**PELI 1 YEAR LIMITED WARRANTY FOR AALG PRODUCTS**

Peli Products, S.L.U. ("Peli") warrants to the original purchaser that its Remote Area Lighting Systems (RALS) and all other products manufactured by the Advanced Area Lighting Group (AALG) will be free of defects in materials and workmanship under normal use, service, and maintenance for a period of twelve months from the date of purchase. This warranty applies only to the original purchaser and is not transferable.

TO THE EXTENT PERMITTED BY LAW: (A) THIS WARRANTY IS IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE; AND (B) ALL OTHER IMPLIED WARRANTIES AND ANY LIABILITY NOT BASED UPON CONTRACT ARE HEREBY DISCLAIMED AND EXCLUDED.

TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL PELI BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE.

To the extent permitted by law, in no event shall Peli's liability to the purchaser for damages hereunder exceed the purchase price of the product in respect of which damages are claimed. With valid dated proof of purchase, Peli will either repair or replace ay defective part, at our sole option. TO THE EXTENT PERMITTED BY LAW, THE REMEDIES HEREBY PROVIDED SHALL BE THE SOLE AND EXCLUSIVE REMEDIES OF THE ORIGINAL PURCHASER. Any repaired or replacement part or unit is covered only for the unexpired portion of the warranty on the original product purchased.

To make a warranty claim in Europe, Africa and/or the Middle East, the purchaser must contact a Peli Authorized Distributor. Any warranty claims shall be made by the purchaser as soon as practicable and in no event more than twelve months from the date of purchase. The purchaser must provide valid dated proof of purchase. In the event that it is determined the product is defective within the terms of this warranty, the Authorized Dealer will inform the customer whether the product will be repaired or replaced, at its sole option.

All warranty claims of any nature are barred if the product has been altered or in any way physically changed, or subjected to abuse, misuse, negligence or accident. Some countries do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from country to country. Consumers have legal rights under applicable national legislation governing the sale of consumer goods. This guarantee does not affect those rights.