

LRF241 Laser Rangefinder Module

Noptel

- Ultra compact and lightweight sensor
- Highly integrated technology
- For harsh environmental conditions
- Pulsed time-of-flight measurement
- Low power consumption
- Max. range 6000 m
- Standard serial interface
- Easy integration to mobile or stationary systems
- Diode laser 1.5 μm wavelength
- Wide temperature range
- Shock and vibration resistant
- Eye safe operation
- Available without enclosure for OEM applications



The compact, eye safe and highly integrated LRF laser rangefinder is used in many applications, from demanding military measurements to portable systems.


The unit is delivered without enclosure providing especially for the OEM-users the possibility to embed the unit into their own product or device.

Applications

- Vehicle mounted reconnaissance systems
- Airborne, land and maritime systems
- Observation and surveillance systems
- Fire control systems
- Mobile range finding
- Target acquisition
- Handheld targeting systems
- Sights

Noptel LRF241-M2 Laser Rangefinder Module

Technical Specifications

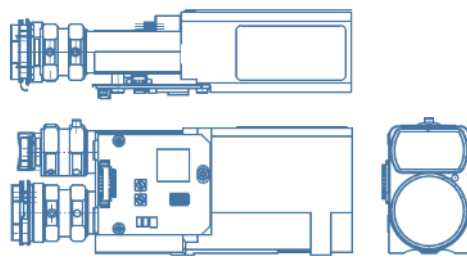

Performance Characteristics	Unit	LRF241-M2	Note
Laser safety class	-	1	Eye safe
Wavelength	µm	1.5	
Measurement range	m	30 - 6000	
Measurement range, Standard target	m	3500	Target size 2.3 x 2.3 m, visibility 10 km, target reflectivity 30%, detection probability 90%
Extinction ratio	dB	28.2	Large target @ 500 m, visibility 23 km, target reflectivity 85%
Measuring rate	Hz	0.5 - 10	Higher measuring rates have limited range
Precision	m	0.5 - 1	Depending on the distance and target reflectivity
Beam divergence	mrad	0.8 x 1.0	
False detection rate	%	< 1	
Target discrimination	m	< 20	
Range gating resolution	m	1	
Operating temperature	°C	-32 - +65	
Storage temperature	°C	-46 - +71	

Mechanical characteristics	Unit	LRF241-M2	Note
Size (L/W/H)	mm	120 / 31 / 45	
Weight	g	150	
Alignment retention	mrad	± 0.4	Within operating temperature range
Alignment pointer	nm	635	Laser Class 1
IP Protection	-	N/A	

Electrical characteristics	Unit	LRF241-M2	Note
Serial interface	-	UART 3.3 V	Connector type: Molex 53261-0871 Firmware update via serial interface
Supply voltage	V	2.7 - 5.0	
Start-up time	s	< 0.5	
Power consumption during measurement	W	< 2.5	
Power consumption in stand-by mode	W	< 0.06	Unit can be completely shut down by external signal to further minimize power consumption

The product requires export license. Specifications are subject to change without notice. Doc.: M42931CE